iMINI USB PDF

- Economical single use PDF data logger
- Report output in .pdf format, no custom software required
- Smaller than a credit card, lays flat
- Durable lightweight; weighs less than 20g
- Easy programming with Console Plus Cloud based software
- LED indicators provide status alert of logger

New Operating Software

Escort's popular iMINI is getting a makeover with new software and new features to improve monitoring of your temperature sensitive products. The chart below highlights the many new hardware and software improvements of the iMINI USB PDF. The new iMINI USB PDF will be available December 2012. Console Plus software provides an easy to read .pdf report. This report is produced by simply plugging in the data logger to a USB port.

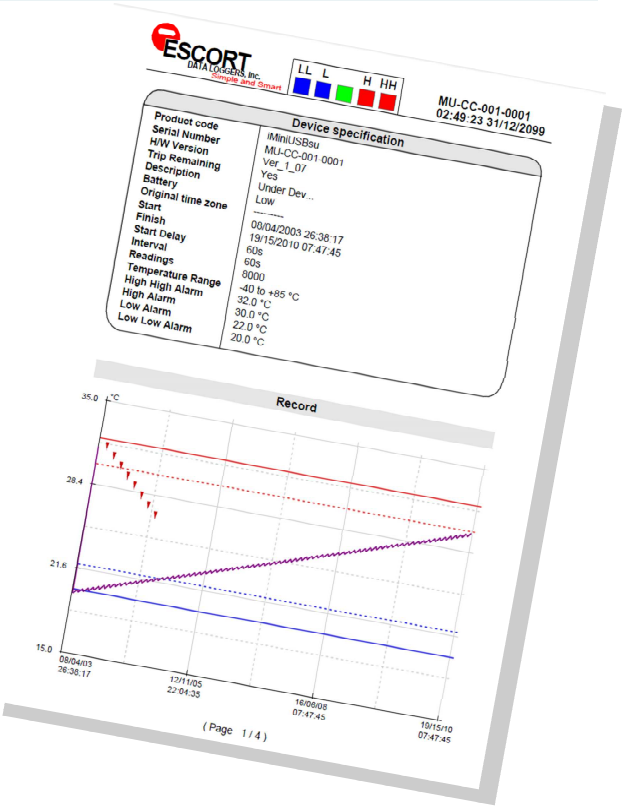

Description	Specs
Software	
Software requirement: To Program/ Download	Escort Console Plus
Software requirement: To View the data	No, Plug & play - Auto PDF generation Adobe Acrobat, Adobe reader or other PDF software must be installed to view the PDF
Auto software detection and download	Yes
Auto upload to cloud (via standard USB cable)	Yes
Multiple format (PDF, Excel, text) options	Yes
Complete customizable programming	Yes

Description	Specs
Hardware	Temperature Data Logger (Single Use)
File format	PDF* .EVT, *.CSV, *.TXT
Start option	Push button and/or Timer
Stop button	Yes, Option to enable or disable STOP button
Stop Option	Push STOP button and/or Timer
Temperature Range	-40^{0}C to +80^{0}C
Resolution	0.1^{0}C
Temperature accuracy from -40℃ to -10℃	0.5^{0}C
Temperature accuracy from -10℃ to +80℃	0.3^{0}C
Bookmark	Yes, Brief press of START button when logging
Interface	USB, Built in
Memory	16K, ≈ 8000 readings
Sensor	1, Internal NTC
Alarm	4 thresholds: HIGHHIGH; HIGH; LOW; LOWLOW
Alarm thresholds with LED visual	Red LED flash—HIGH/HIGHHIGH Blue LED flash—LOW/LOWLOW
Size (Dimensions)	Smaller than a credit card61mm x 37mm x 5mm (without plastic sleeve)81mm x 52mm x5mm (with plastic sleeve)
Weight	Less than 20g
IP Rating	IP 65, Completely Food Safe
Accuracy Certificate	In the memory
Other certification	CE, ISO9001:2008, RoHS
Shelf Life	1 Year
Time Accuracy	±1 hour per year
Calibration (points)	5 point Calibration
Program Option	Pre-programmed and User Programmable
Alarm Configuration	Consecutive and Non-Consecutive
Password Protection (Program)	Yes
Password Protection Download	Yes
Time above/below specification	By LED blink counts (refer to user manual)
Temperature Units ℉ and ℃	Yes
Start delay	Yes, 0 minute to 30 days 23 hours 59 minutes
Program interval	1 Sec - 17 hours
Warranty	1 Trip

For more information call us at 888-827-3393 x131 or visit us at escortdataloggers.com